Bias Tee

BT-10M2P5G

10 MHz to 2.5 GHz, 2500 mA and 100 VDC, SMA

HZ-THZ

Rev. 0

Description

HZ-THZ BT-10M2P5G is a SMA bias tee (also known as bias T) that operates from 10 MHz to 2.5 GHz with a bias rating of 100 VDC and 2500 mA. This bias tee is configured with SMA inputs on the RF ports and SMA on the bias port. BT-10M2P5G SMA bias T offers good electrical performance featuring 0.5 dB insertion loss and 30 dB isolation. Bias tees are typically used to inject a DC signal into an RF path such as when biasing an amplifier or any other active device, supplying power to the connected output without disrupting the RF signal. They can also be used as DC returns to provide a ground return path for the input device or DC blocks to prevent direct current signals from flowing through the output device. HZ-THZ bias tees are available in various connector configurations over different frequency bands to fit your needs, all of which shipped worldwide the same day.

Features

- Broadband: 10 MHz to 2.5 MHz
- Low Insertion Loss
- Isolation 30 dB
- 2500 mA / 100 VDC Bias
- RF Power 5 W Max

Applications

- Amplifier Biasing
- Coax
- Wireless Systems
- DC Return / Block
- Test and Measurement
- Transmitting Power With a Single
- Communication Systems

Configuration

RF Port Connector SMA Female
DC/RF Port Connector SMA Female
DC Port Connector SMA Female

BT-10M2P5G 10 MHz to 2.5 GHz, 2500 mA and 100 VDC, SMA

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	0.01		2.5	GHz
Impedance		50		Ohms
VSWR		1.2	1.5	: 1
Insertion Loss		0.5	1.25	dB
RF to Bias Isolation		30		dB
DC Current			2500	mA
DC Voltage			100	Vdc
RF Power			5	W
Risetime/Falltime		10		ps
Operating Temperature	-55		+105	$^{\circ}\!\mathbb{C}$
Storage Temperature	-55		+125	$^{\circ}\!\mathbb{C}$

Electrical Specification Notes:

Values at +25°C, sea level.

Mechanical Specifications

•	7	^
. 71	•	_

 Length
 1.29 in [32.80 mm]

 Width
 0.71 in [18.00 mm]

 Height
 0.55 in [14.00 mm]

 Weight
 0.07 lbs [30.00 g]

Package Type Customized

Outline Drawings

Unit: mm


Tolerance: ±0.05 mm

Bias Tee

BT-10M2P5G

10 MHz to 2.5 GHz, 2500 mA and 100 VDC, SMA

HZ-THZ

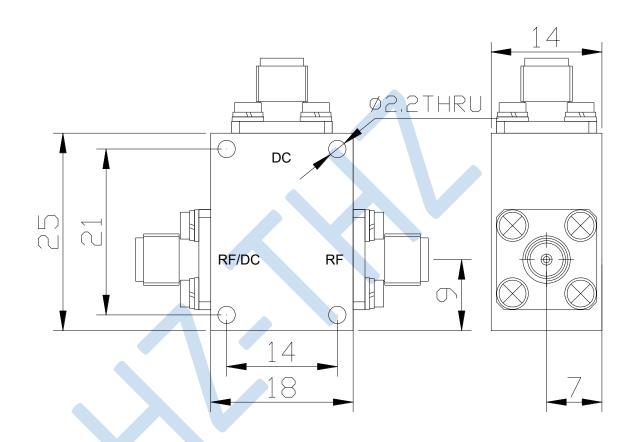

How To Order

BT-10M2P5G

Pls send request to sales@hz-thz.com.