## **Low Noise Amplifier**

LNA-2M1G

2 MHz to 1 GHz, 2.5 dB NF, 17 dBm P1dB, 34 dB Gain, SMA

**HZ-THZ** 

### **Description**

LNA-2M1G low noise amplifier from HZ-THZ (also known as LNA) is featured in our extensive in-stock RF amplifier selection. Our connectorized low noise amplifier uses SMA connectors at 50 Ohm. HZ-THZ low noise amplifier has a minimum frequency of 2 MHz and maximum frequency of 1 GHz. The significantly low noise figure of this radio frequency amplifier is 2.5 dB with a typical gain of 34 dB. The output power P1dB of this LNA is 17 dBm.

LNA amplifier LNA-2M1G is rated at 12 Volts DC and 150 mA. Our low noise amplifiers are available in various configurations over different frequency bands to fit your needs, all of which shipped worldwide the same day.

#### **Features**

■ Broadband: 2 MHz to 1 GHz

■ Noise Figure: 2.5 dB

■ P1dB: 17 dBm

■ Small Signal Gain: 34 dB typical

■ 50 Ohm Input and Output Matched

- -40~+85°C Operating Temperature
- Unconditionally Stable
- Single DC Positive Supply

### **Applications**

- Laboratory Applications
- R&D Labs
- Radar Systems
- Telecom Infrastructure
- Test Instrumentation
- Communication Systems

- Wireless Communication
- Microwave Radio Systems
- Low Noise Amplifier
- General Purpose Amplification
- General Purpose Wireless
- RF Pre-amplification

# **Low Noise Amplifier**

LNA-2M1G

2 MHz to 1 GHz, 2.5 dB NF, 17 dBm P1dB, 34 dB Gain, SMA

**HZ-THZ** 

### **Electrical Specifications**

Description	Minimum	Typical	Maximum	Units
Frequency Range	0.002		1	GHz
Small Signal Gain		34	38	dB
Gain Flatness		±1.0	±1.5	dB
Input VSWR		1.8	2.0	:1
Output VSWR		1.5	2.0	:1
Noise Figure		2.5	3.0	dB
Output Power P1dB		15	17	dBm
Output 3rd Intercept Point		32		dBm
Operating DC Current		100	150	mA
Operating DC Voltage		+12		Volts
Input Connector	SMA Female			
Output Connector	SMA Female			

**Electrical Specification Notes:** 

Values at +25°C, sea level.

## **Absolute Maximum Rating**

Parameter	Rating	Units
DC Voltage	+18	Volts
RF Input Power	+10	dBm
Operating Temperature	-40 to +70	°C
Storage Temperature	-55 to +85	$^{\circ}\mathrm{C}$

# **Low Noise Amplifier**

### LNA-2M1G

**HZ-THZ** 

2 MHz to 1 GHz, 2.5 dB NF, 17 dBm P1dB, 34 dB Gain, SMA

### **Mechanical Specifications**

Size

 Length
 2.05 in [52.00 mm]

 Width
 1.29 in [32.70 mm]

 Height
 0.39 in [10.00 mm]


Weight 0.38 lbs [172.00 g]

Package Type Customized

### **Outline Drawings**

Unit: mm

Tolerance: ±0.05 mm

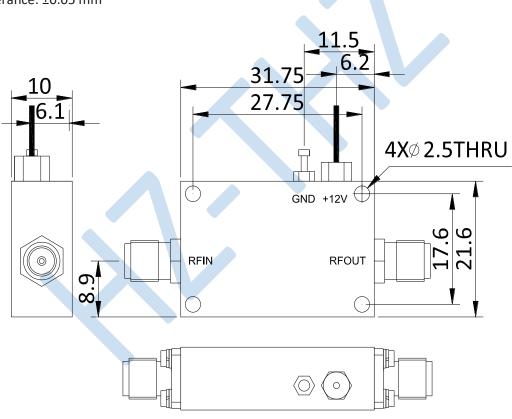

#### **How To Order**

### LNA-2M1G

Pls send request to sales@hz-thz.com.