

Description

HZ-THZ BT-0050-2 is a 2.4mm bias tee (also known as bias T) that operates from 500 KHz to 50 GHz with a bias rating of 50 VDC and 1000 mA. This bias tee is configured with 2.4mm inputs on the RF ports and 2.4mm on the bias port. BT-0050-2 2.4mm bias T offers good electrical performance featuring 1.5 dB insertion loss and 30 dB isolation. Bias tees are typically used to inject a DC signal into an RF path such as when biasing an amplifier or any other active device, supplying power to the connected output without disrupting the RF signal. They can also be used as DC returns to provide a ground return path for the input device or DC blocks to prevent direct current signals from flowing through the output device. HZ-THZ bias tees are available in various connector configurations over different frequency bands to fit your needs, all of which shipped worldwide the same day.

Features

- Broadband: 500 KHz to 50 GHz
- Low Insertion Loss
- Isolation 30 dB
- 1000 mA / 50 VDC Bias
- RF Power 5 W Max

Applications

- Amplifier Biasing
- Coax
- Wireless Systems
- DC Return / Block
- Test and Measurement
- Transmitting Power With a Single
- Communication Systems

Configuration

RF Port Connector	2.4mm Female
DC/RF Port Connector	2.4mm Female
DC Port Connector	SMA Female

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	0.0005		50	GHz
Impedance		50		Ohms
VSWR		1.58		: 1
Insertion Loss		1.5	2.5	dB
RF to Bias Isolation		30		dB
DC Current			1000	mA
DC Voltage			50	Vdc
RF Power			5	W
DC Resistance		0.5		Ω
Inductance		22		μ H
Capacitance		100		μ F
Risetime/Falltime		10		ps
Operating Temperature	-55		+105	$^{\circ}$ C
Storage Temperature	-55		+125	$^{\circ}$ C

Electrical Specification Notes:

Values at +25 $^{\circ}$ C, sea level.

Mechanical Specifications

Size

Length 1.72 in [43.80 mm]

Width 1.20 in [30.60 mm]

Height 0.51 in [13.00 mm]

Weight 0.07 lbs [30.00 g]

Package Type Customized

Outline Drawings

Unit: mm


Tolerance: \pm 0.05 mm

Bias Tee

BT-0050-2

500 KHz to 50 GHz, 1000 mA and 50 VDC, 2.4mm

HZ-THZ

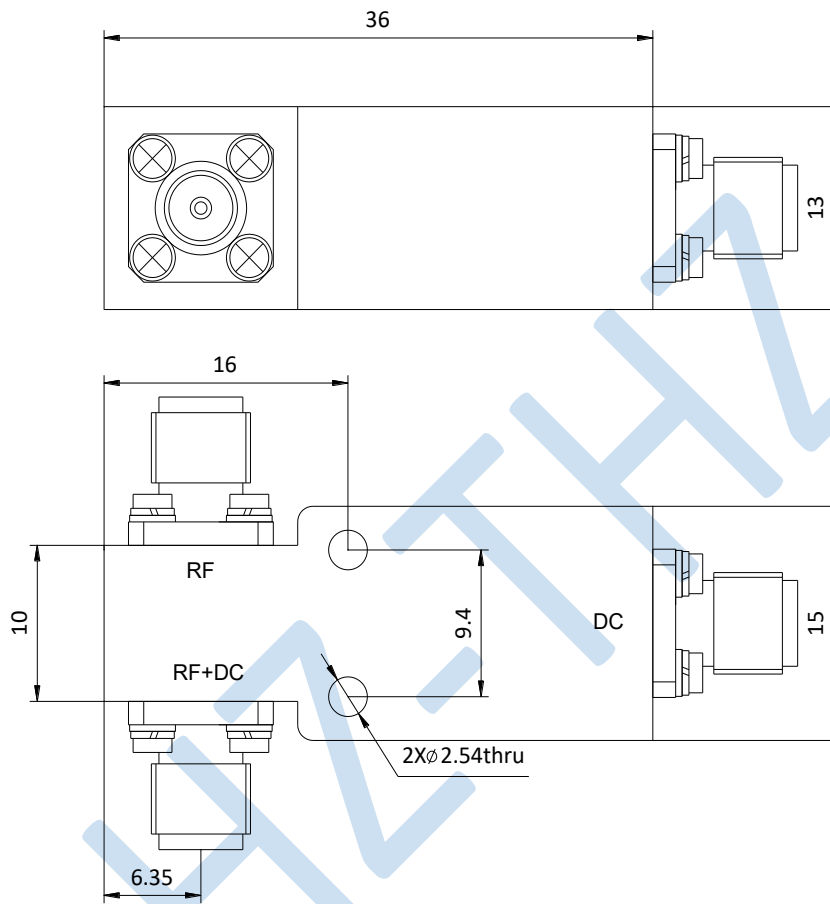

How To Order

BT-0050-2

Pls send request to sales@hz-thz.com.