

Description

PA-100M6G RF power amplifier is from HZ-THZ (also known as SSPA) is featured in our extensive in stock radio frequency microwave, millimeter wave and Terahertz amplifier selection. Our connectorized power amplifier uses SMA connectors at 50 Ohm. HZ-THZ coaxial power amplifier has a minimum frequency of 100 MHz and maximum frequency of 6 GHz. This solid state power amplifier is rated with a P1dB of 31 dBm typical. The gain of the SSPA is 42 dB typical.

PA amplifier PA-100M6G is rated at 12 Volts DC and 700 mA. Our power amplifiers are available in various configurations over different frequency bands to fit your needs, all of which shipped worldwide the same day.

Features

- Broadband: 100 MHz to 6 GHz
- P1dB: 31 dBm
- Gain: 42 dB min
- 50 Ohm Input and Output Matched
- -40~+85°C Operating Temperature
- Unconditionally Stable
- Single DC Positive Supply

Applications

- Laboratory Applications
- R&D Labs
- Radar Systems
- Telecom Infrastructure
- Test Instrumentation
- Communication Systems
- Wireless Communication
- Microwave Radio Systems
- Power Amplifier
- High Dynamic Range Amplifier
- General Purpose Amplification
- Military & Space

Power Amplifier

PA-100M6G

100 MHz to 6 GHz, 31 dBm P1dB, 42 dB Gain, SMA

HZ-THZ

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	100		6	GHz
Gain	40	42		dB
Gain Flatness		±1.5	±2.0	dB
Input VSWR		1.5	2	: 1
Output VSWR		1.5	2	: 1
Output Power P1dB		31		dBm
Saturated Output Power (Psat)	31	32		dBm
Output 3rd Intercept Point		40		dBm
Operating DC Current		700	1000	mA
Operating DC Voltage	12		14	Volts
Input Connector		SMA Female		
Output Connector		SMA Female		

Electrical Specification Notes:

Values at +25°C, sea level.

Absolute Maximum Rating

Parameter	Rating	Units
DC Voltage	+12 to +14	Volts
Operating Temperature	-40 to +85	°C
Storage Temperature	-55 to +125	°C

Power Amplifier

HZ-THZ

PA-100M6G

100 MHz to 6 GHz, 31 dBm P1dB, 42 dB Gain, SMA

Mechanical Specifications

Size

Length	1.89 in [48.00 mm]
Width	1.81 in [46.00 mm]
Height	0.47 in [12.00 mm]


Weight 0.45 lbs [205.00 g]

Package Type Customized

Outline Drawings

Unit: mm

Tolerance: ± 0.05 mm

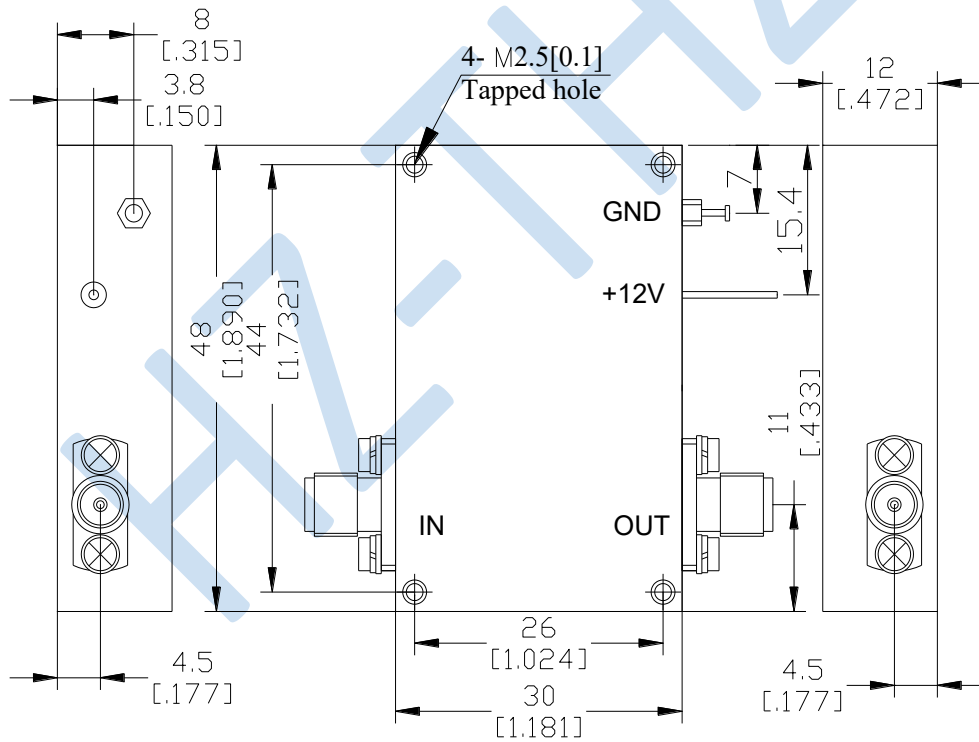

How To Order

PA-100M6G

Pls send request to sales@hz-thz.com.