

Description

PA-2000K30M RF power amplifier is from HZ-THZ (also known as SSPA) is featured in our extensive in stock radio frequency microwave, millimeter wave and Terahertz amplifier selection. Our connectorized power amplifier uses SMA connectors at 50 Ohm. HZ-THZ coaxial power amplifier has a minimum frequency of 2 MHz and maximum frequency of 30 MHz. This solid state power amplifier is rated with a P1dB of 32 dBm typical. The gain of the SSPA is 28 dB typical.

PA amplifier PA-2000K30M is rated at 12 Volts DC and 800 mA. Our power amplifiers are available in various configurations over different frequency bands to fit your needs, all of which shipped worldwide the same day.

Features

- Broadband: 2 MHz to 30 MHz
- P1dB: 32 dBm
- Gain: 28 dB min
- 50 Ohm Input and Output Matched
- -40~+85°C Operating Temperature
- Unconditionally Stable
- Single DC Positive Supply

Applications

- Laboratory Applications
- R&D Labs
- Radar Systems
- Telecom Infrastructure
- Test Instrumentation
- Communication Systems
- Wireless Communication
- Microwave Radio Systems
- Power Amplifier
- High Dynamic Range Amplifier
- General Purpose Amplification
- Military & Space

Power Amplifier

PA-2000K30M

2 MHz to 30 MHz, 32 dBm P1dB, 28 dB Gain, SMA

HZ-THZ

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	0.002		0.03	GHz
Gain	25	28		dB
Gain Flatness		±0.15	±0.20	dB
Input VSWR		1.5	2.0	: 1
Output VSWR		1.5	2.0	: 1
Output Power P1dB		32		dBm
Saturated Output Power (Psat)	33	34		dBm
Output 3rd Intercept Point		40		dBm
Operating DC Current		800	1200	mA
Operating DC Voltage	12		15	Volts
Input Connector		SMA Female		
Output Connector		SMA Female		

Electrical Specification Notes:

Values at +25°C, sea level.

Absolute Maximum Rating

Parameter	Rating	Units
DC Voltage	+12 to +15	Volts
Operating Temperature	-40 to +85	°C
Storage Temperature	-55 to +125	°C

Power Amplifier

HZ-THZ

PA-2000K30M

2 MHz to 30 MHz, 32 dBm P1dB, 28 dB Gain, SMA

Mechanical Specifications

Size

Length 1.89 in [48.00 mm]
Width 1.81 in [46.00 mm]
Height 0.47 in [12.00 mm]


Weight 0.45 lbs [205.00 g]

Package Type Customized

Outline Drawings

Unit: mm

Tolerance: ± 0.05 mm

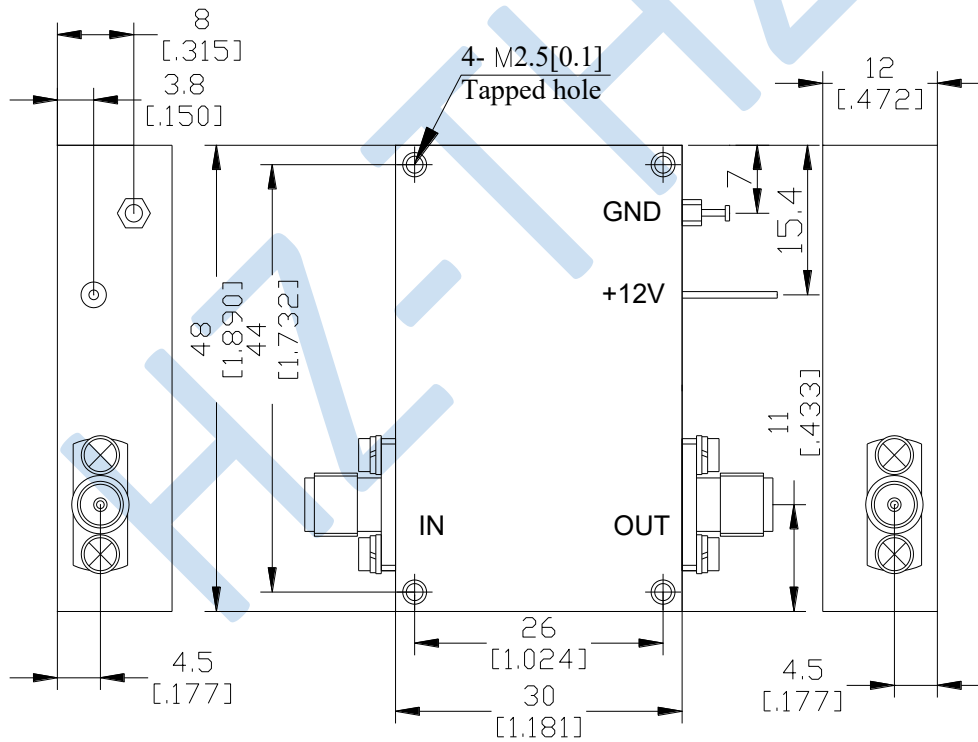

How To Order

PA-2000K30M

Pls send request to sales@hz-thz.com.